

**FEATURES**

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

**TYPICAL APPLICATIONS**

For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer, and telecommunication.

**MECHANICAL DATA**

- **Package:** DO-214AC (SMA)  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

**MAXIMUM RATINGS** ( $T_a=25^\circ\text{C}$  Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	GS2AA	GS2BA	GS2DA	GS2GA	GS2JA	GS2KA	GS2MA
Device marking code			GS2AA	GS2BA	GS2DA	GS2GA	GS2JA	GS2KA	GS2MA
Repetitive peak reverse voltage	VRRM	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, Resistance load, $T_a$ (FIG.1)	$I_O$	A	2						
Surge(non-repetitive)forward current @60Hz Half-sine wave,1 cycle, $T_a=25^\circ\text{C}$	IFSM	A	50						
Storage temperature	$T_{stg}$	$^\circ\text{C}$	-55~+150						
Junction temperature	$T_j$	$^\circ\text{C}$	-55 ~ +150						

**ELECTRICAL CHARACTERISTICS** ( $T_a=25^\circ\text{C}$  Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	GS2AA	GS2BA	GS2DA	GS2GA	GS2JA	GS2KA	GS2MA
Maximum instantaneous forward voltage drop per diode	$V_F$	V	IFM=2.0A	1.15						
Maximum DC reverse current at rated DC blocking voltage per diode @ VRM=VRRM	IRRM	$\mu\text{A}$	$T_a=25^\circ\text{C}$	5						
			$T_a=125^\circ\text{C}$	100						

**THERMAL CHARACTERISTICS** ( $T_a=25^\circ\text{C}$  Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	GS2AA	GS2BA	GS2DA	GS2GA	GS2JA	GS2KA	GS2MA
Thermal Resistance	$R_{\theta J-A}$	$^\circ\text{C/W}$	65 <sup>(1)</sup>						
	$R_{\theta J-L}$	$^\circ\text{C/W}$	20 <sup>(1)</sup>						

Note  
(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with (15.0 mm x7.5 mm) copper pad areas

**CHARACTERISTICS (TYPICAL)**

FIG1: Io-TL Curve

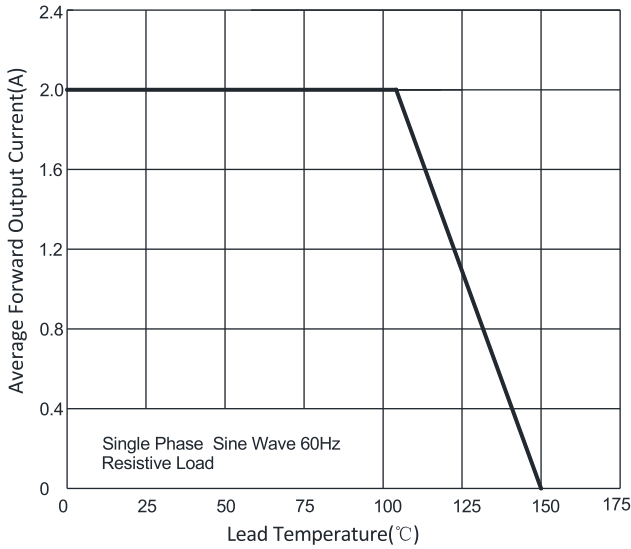


FIG2: Surge Forward Current Capability

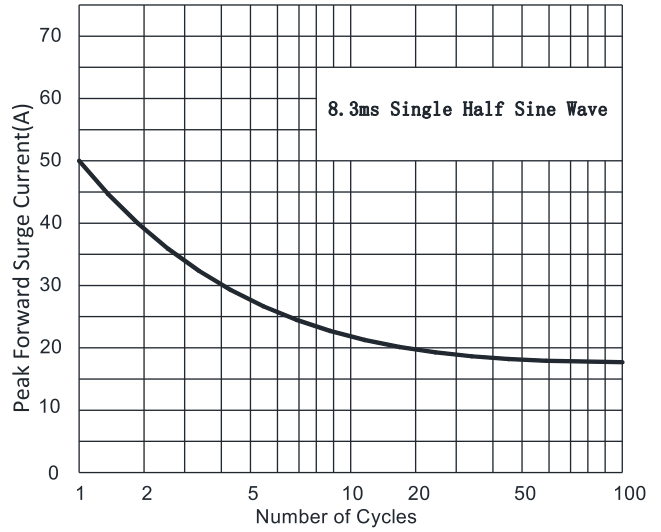


FIG3: Forward Voltage


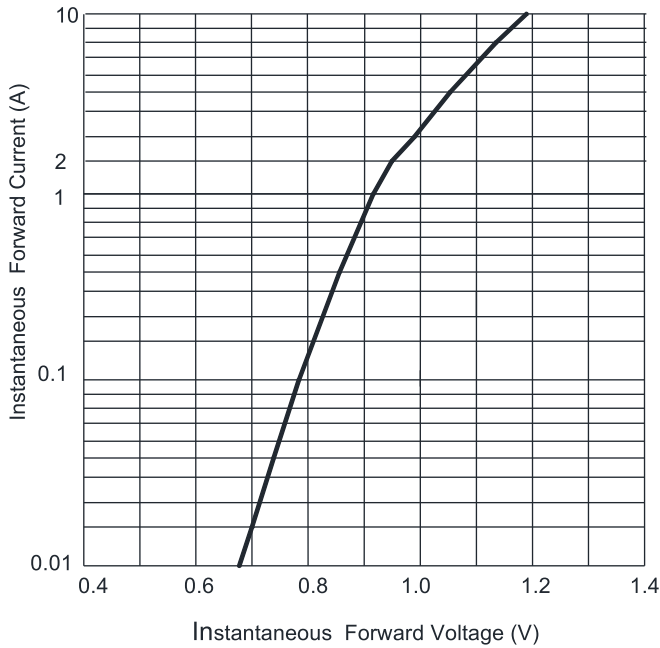



FIG4: Typical Reverse Characteristics

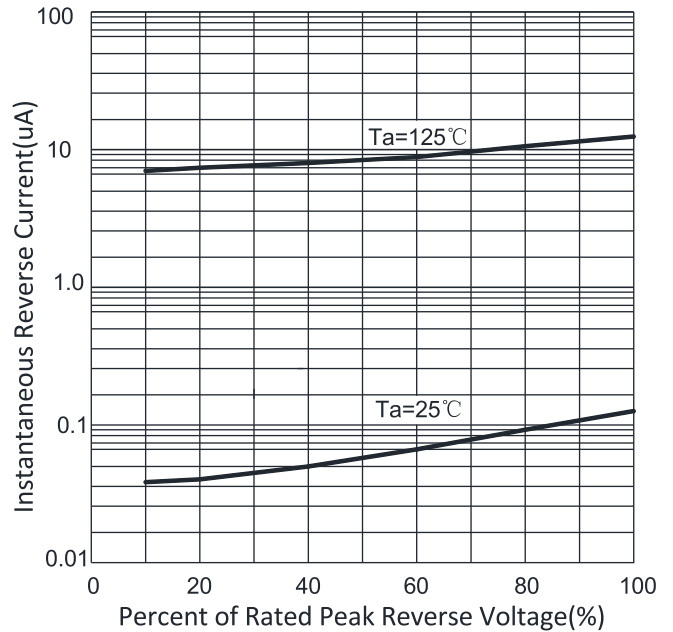

**PACKAGING INFORMATION**


PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
GS2AA-GS2MA	Omit for Standard	Approximate 0.059	5000	10000	80000	13" reel
GS2AA-GS2MA	X07	Approximate 0.059	1800	7200	57600	7" reel

**OUTLINE DIMENSIONS**

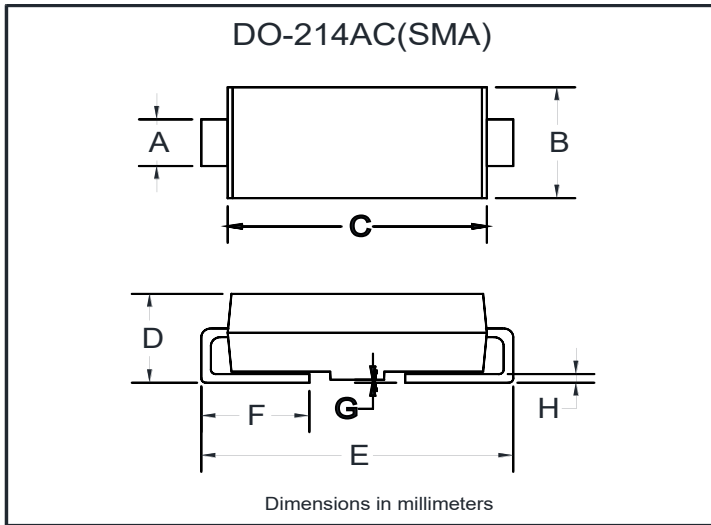

DO-214AC(SMA)		
Dim	Min	Max
A	1.25	1.58
B	2.40	2.83
C	4.25	4.75
D	1.90	2.30
E	4.93	5.28
F	0.76	1.41
G	0.08	0.20
H	0.15	0.31

**SUGGESTED PAD LAYOUT**

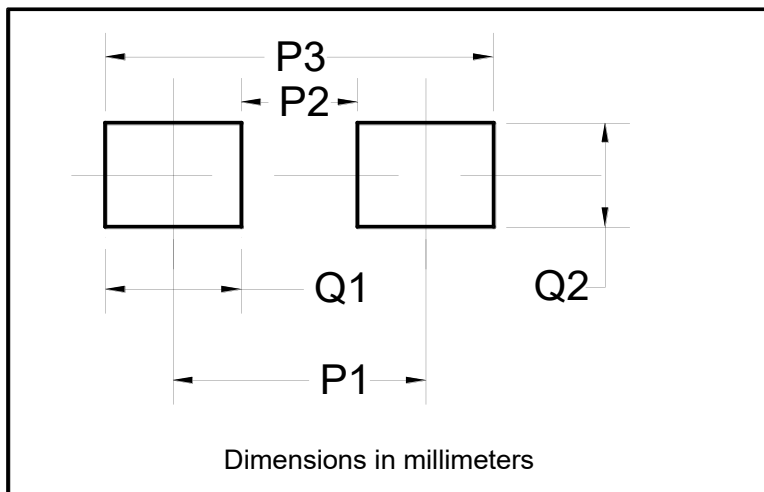

DO-214AC(SMA)	
Dim	Millimeters
P1	4.00
P2	1.50
P3	6.50
Q1	2.50
Q2	1.70