

■ FEATURES

- Adopt FRED chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

■ TYPICAL APPLICATIONS

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

■ MECHANICAL DATA

- **Package:** ITO-220AC
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■ MAXIMUM RATINGS (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MUR540F
Device marking code			MUR540F
Repetitive Peak Reverse Voltage	V _{RRM}	V	400
Average Rectified Output Current @60Hz sine wave, R-load, T _c (FIG.1)	I _o	A	5
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, T _a =25°C	I _{FSM}	A	50
Current Squared Time @1ms≤t≤8.3ms T _j =25°C,	I ² t	A ² s	10
Storage Temperature	T _{stg}	°C	-55 ~ +150
Junction Temperature	T _j	°C	-55 ~ +150
Junction capacitance @4V,1MHz	C _j	pF	50

■ ELECTRICAL CHARACTERISTICS (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Min	Typ	Max	
Instantaneous forward voltage drop per diode	V _{FM}	V	I _{FM} =5.0A @T _j =25°C	-	1.15	1.25	
			I _{FM} =5.0A @T _j =150°C	-	0.9	1	
DC reverse current at rated DC blocking voltage per diode	I _{RRM1}	uA	V _{RM} =V _{RRM} T _j =25°C	-	-	5	
	I _{RRM2}		V _{RM} =V _{RRM} T _j =150°C	-	25	50	
Reverse Recovery Time	T _{RR}	ns	I _F =0.5A I _{RM} =1A I _{RR} =0.25A T _j =25°C	-	25	35	
Peak recovery current	I _{RRM}	A	T _j =25°C	I _F =5A di/dt=-200A/us V _{RM} =200V	-	3.49	-
			T _j =125°C		-	5.71	-
Reverse recovery charge	Q _{rr}	nC	T _j =25°C		-	55.22	-
			T _j =125°C		-	130	-

■ **THERMAL CHARACTERISTICS** ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	MUR540F
Thermal Resistance	Between junction and case	$R_{\theta J-C}$	$^{\circ}\text{C}/\text{W}$	4.0
	Between junction and Air	$R_{\theta J-A}$	$^{\circ}\text{C}/\text{W}$	50

■ **PACKAGING INFORMATION**

PREFERED P/N	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MUR540F	Approximate 1.6	50	1000	5000	Tube

■ **CHARACTERISTICS (TYPICAL)**

FIG1: $I_o - T_c$ Curve

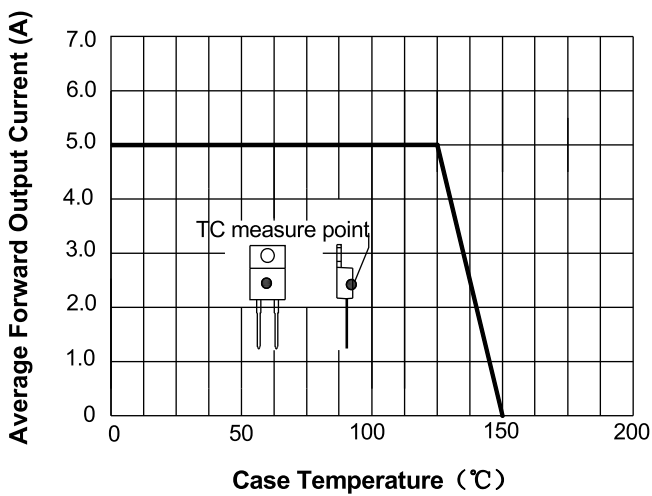


FIG2: Surge Forward Current Capability

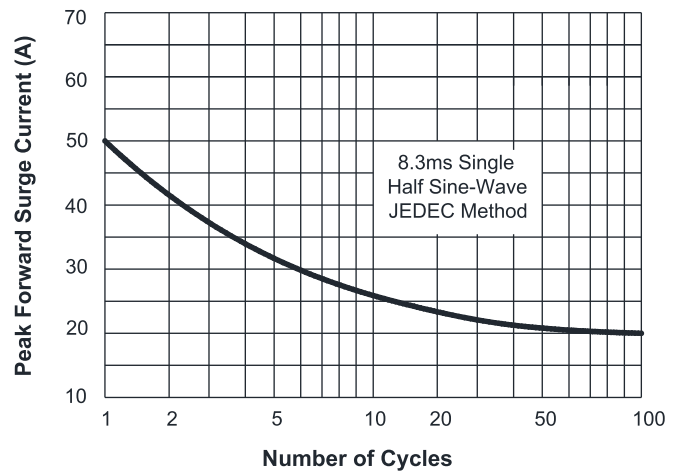


FIG3: Forward Voltage

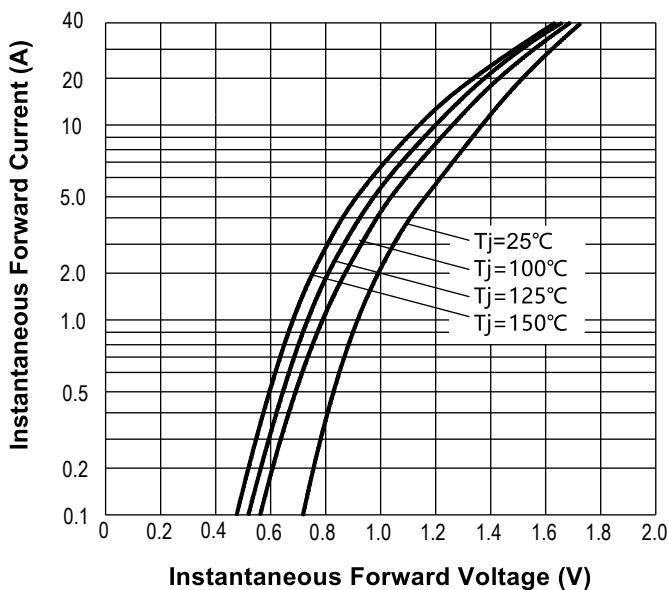


FIG4: Instantaneous Reverse Characteristics



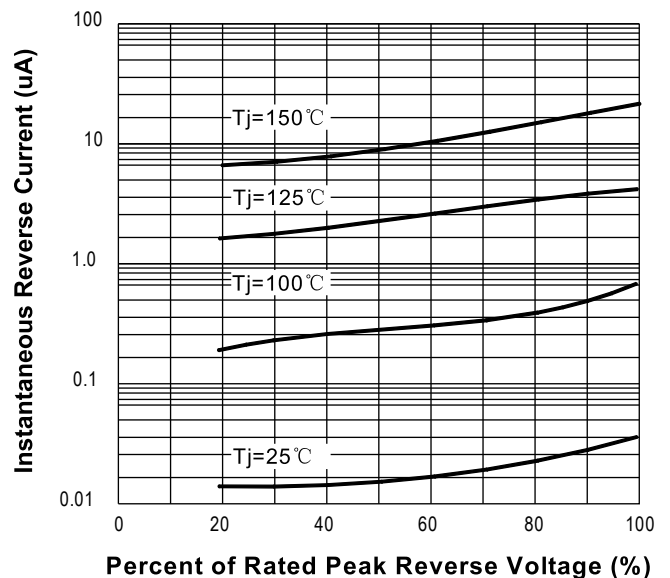


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

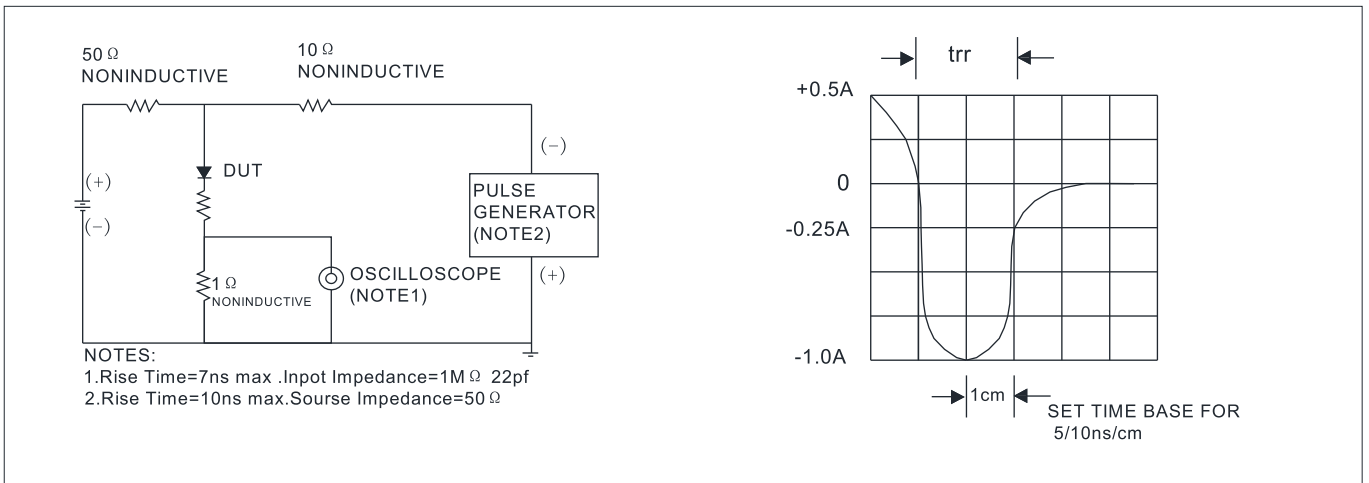

■ **OUTLINE DIMENSIONS**

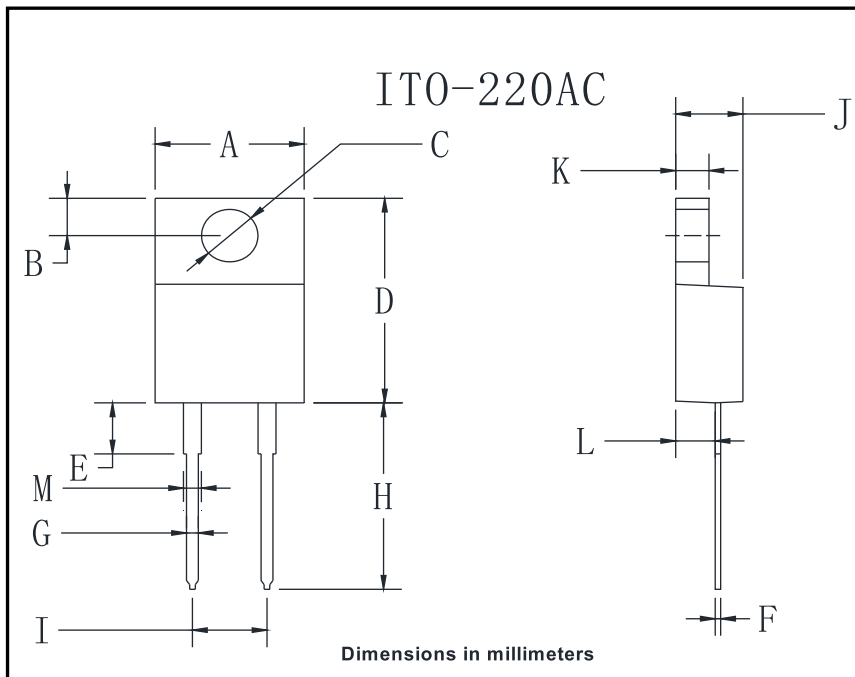

ITO-220AC		
Dim	Min	Max
A	9.8	10.2
B	2.25	2.75
C	2.95	3.45
D	14.75	15.25
E	3.5	4.1
F	0.45	0.75
G	0.45	0.75
H	13.35	14.15
I	4.97	5.23
J	4.3	4.8
K	2.5	2.74
L	2.58	2.82
M	1.03	1.43